


Butyl Sealant Tape

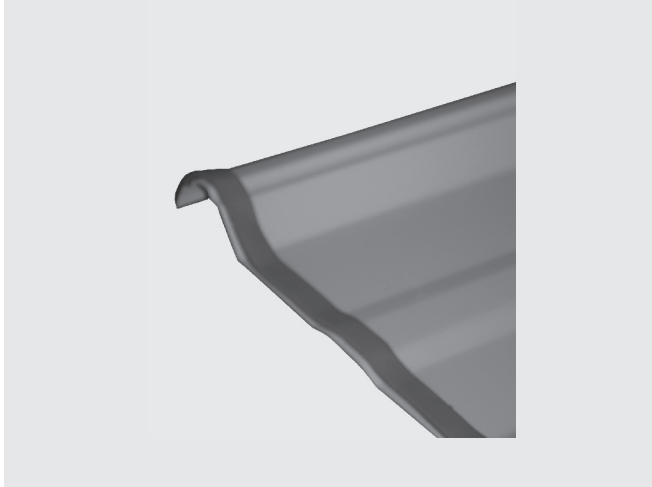

Application

Side and end lap sealing of metal panels, roof vents and pipe flashing

Features and Benefits

- Exceeds sealing requirements for AC, refrigeration and windows
- Extruded on silicone coated paper for easy application
- Greater cohesive strength
- Contains anti-oxidants, fungicides and anti-bacterial agents
- Withstands extreme roof temperatures
- Superior low temperature compressibility
- Cold flow resistant
- Resistant to UV light
- Superior adhesion
- Seal not affected by normal movement of building
- Wide service temperature range

Product Selection

Material No.	Item	Description	Feet/Roll	Rolls/Carton
500070	3/16" Bead Butyl Sealant	SEALANT-3/16"x25'	25'	48
1649153	3/8" x 3/32" Butyl Sealant	SEALANT-3/8"x3/32"x50'	50'	24
500073	1/2" x 3/32" Butyl Sealant	SEALANT-1/2"x3/32"x50'	50'	20
500074	3/4" x 3/32" Butyl Sealant	SEALANT-3/4"x3/32"x50'	50'	14
500075	1" x 1/8" Butyl Sealant	SEALANT-1"x1/8"x40'	40'	12
1304579	7/8" x 3/16" Double Bead Butyl Sealant	SEALANT-7/8"x3/16"x25'-DOUBLE	25'	8
1304575	2-1/2" x 3/16" Triple Bead Butyl Sealant	SEALANT-2-1/2"x3/16"x20'	20'	6

Rolls are packed in water-resistant cartons.
Sold in full carton quantity only.

Butyl Sealant Tape

ASTM Tests for Preformed Sealant Tapes

Test Method	Description	Average
ASTM D792	Specific Gravity, lb./gal	15
ASTM C765	Low Temperature Flexibility	No loss of adhesion or cracking
ASTM C771	Weight Loss after Heat Aging	0.13, No blisters
ASTM C772	Oil Migration/Plasticizer Bleed-Out	0.21" 1st paper
ASTM C782	Softness mm. penetration	6.47 mm
ASTM C907	Tensile Adhesive Strength, lb. force	16.45 psi, MOF: cohesive
ASTM C908	Yield Strength, lb. force	10.705 psi

Installation and Application Considerations

Surfaces: All surfaces to be sealed should be free of dust, dirt, oil and moisture before applying sealant.

Temperature: Apply in dry conditions above 40°F (4°C); At temperatures below 40°F (4°C) atmospheric condensation surfaces inhibit adhesion and should be avoided.

Application: Apply tape to surface directly from roll. Press sealant through the silicone release paper with a smooth, even hand motion. Sealant to be placed in accordance to panel manufacturer's recommendations.